

Repair metal, wood, glass, concrete and ceramics

# RepairitQuik<sup>®</sup>

**MULTI-PURPOSE EPOXY REPAIR PUTTY STICK**

## Repair...

- Auto trim
- Concrete
- Bricks
- Broken or loose wall and floor tile
- Emergency repairs

## Mend...

- Toys
- Appliances
- Lawn mowers
- Sports equipment
- Holes in auto bodies

## Fabricate...

- Small parts
- Electrical connectors
- Taxidermy
- Knobs
- Missing detail



- The ultimate solution for small or emergency repairs
- Easy-to-use and mistake-proof
- Bonds instantly with superior strength
- Saves hundreds of dollars in repairs
- Belongs in every toolbox or fix-it kit


Repairs luggage and sports equipment quickly and easily - great for emergency repairs!



Fabricates handles and knobs for cookware, appliances, tools!



Molds easily to replace small or missing parts!

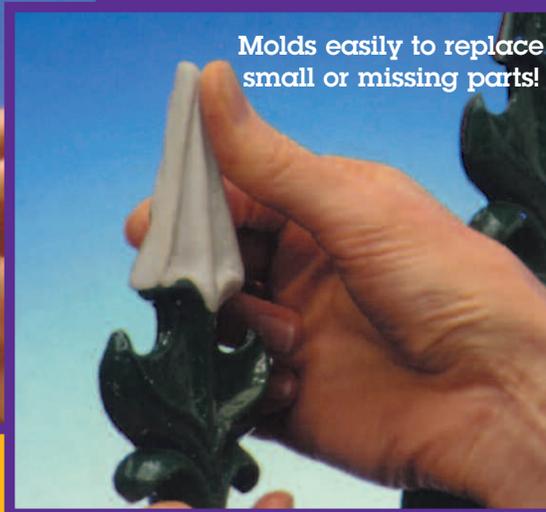

Made in U.S.A.

**PSI** POLYMERIC SYSTEMS, INC.

3

MINUTE  
WORK  
LIFE

# RepairitQuik Multi-Purpose Epoxy Putty Repair Stick

## Product Description

RepairitQuik is a hand-mixable, fast-setting, epoxy putty for quick, permanent repairs to ceramics, glass, metals, concrete, wood, and numerous plastics. After mixing, it forms an industrial-strength polymer compound for numerous repairs around the home or workshop. After 60 minutes the application can be sawed, sanded, tapped, drilled, machined, filed, and painted. Each handy stick contains pre-measured portions of activator and base throughout — no measuring or mixing tools are necessary. The consistency (like modeling clay) eliminates drips and runs, facilitates adhesion to the substrate, and allows the material to be shaped and formed as needed before curing begins. RepairitQuik cures to an off-white color. Suitable for interior or exterior use, it is resistant to water, chemicals, and temperature extremes. RepairitQuik contains no solvents or VOCs. It's non-flammable and releases no noxious fumes. It won't shrink or pull away. The unused portion stays fresh for future use when saved in its original package.

## Performance Data\*

|   |   |
|---|---|
| <b>SHELF LIFE AT 75°F (24°C)</b>              | <b>24 months minimum</b>                  |
| <b>SHORE D HARDNESS AT FULL CURE (24 hrs)</b> | <b>75</b>                                 |
| <b>LAP SHEAR TENSILE STRENGTH</b>             |   |
| On steel (1" x 1" x 1/16")                    | <b>900 lbs (6.2 MPa)</b>                  |
| <b>COMPRESSIVE STRENGTH</b>                   | <b>8,000 psi (55 MPa)</b>                 |
| <b>DENSITY</b>                                | <b>15.8 lb/gal, 1.9 gm/cm<sup>3</sup></b> |
| <b>SHRINKAGE</b>                              | <b>&lt;1%</b>                             |
| <b>NON-VOLATILE CONTENT</b>                   | <b>100%</b>                               |
| <b>ELECTRICAL RESISTANCE</b>                  | <b>30,000 megohms-cm</b>                  |
| <b>DIELECTRIC STRENGTH</b>                    | <b>300 volts/mil</b>                      |
| <b>TEMPERATURE LIMITS</b>                     |   |
| Continuous                                    | <b>-40° to 250°F (-40° to 121°C)</b>      |
| Intermittent                                  | <b>-40° to 300°F (-40° to 149°C)</b>      |

### CHEMICAL RESISTANCE

Resistant to hydrocarbons, ketones, alcohols, esters, halocarbons, aqueous salt solutions and dilute acids and bases.

### NOT INTENDED FOR STRUCTURAL APPLICATIONS

\*Not to be used for specification purposes.

## Applicable Standards



Certified by NSF International to NSF/ANSI Standard 61 for drinking water contact.

Labeling conforms to ASTM D-4236.

## Availability

RepairitQuik is one in a family of Specialty Epoxy Putties originated and manufactured by Polymeric Systems, Inc. Also look for QuikAluminum<sup>®</sup>, QuikCopper<sup>®</sup>, QuikPlastik<sup>®</sup>, FastSteel<sup>®</sup>, AquaMend<sup>®</sup>, InstaCrete<sup>®</sup>, QuikWood<sup>®</sup>, and QuikTitanium<sup>®</sup>. Our epoxy putties give you the ability to fix just about anything.

## Packaging Options

RepairitQuik is available in 3.5" (2 oz) and 7" (4 oz) lengths, individually packaged in a reusable clear plastic tube with trilingual (English, Spanish, French) instructions and plastic friction top. The display carton holds 12 or 24 - 3.5" sticks or 12 - 7" sticks (packed 2 display cartons per master carton), or bulk-packed 24 sticks

per shipper carton. Display cartons are also sold separately for refillable, point-of-purchase display. 3.5" sticks are also available in blister packs (12 per carton); printer minimum applies. Contact Sales for acrylic display rack supplier information.



Pop-Up Cardboard  
Display Carton



Blister  
Packs



Acrylic  
Display Racks

## How To Use

Before applying, roughen and clean the area to be repaired. Wear impervious gloves when mixing or handling uncured RepairitQuik. Then follow these easy steps.



1. Cut



2. Mix



3. Apply

- Cut** or twist off required amount.
- Mix** by kneading with gloved fingers to a uniform color. If mixing is difficult, warm RepairitQuik to room temperature or slightly above.
- Apply** to surface to be repaired within 2 minutes of mixing. Force into any cracks or holes and strike off excess material, preferably with a tool moistened with clean water.

Mixed Color  
**OFF-WHITE**

*When applying to a damp, wet or slowly leaking area, work the mixed material forcefully into the surface and apply pressure until adhesion begins to take effect.*

**For best results:** Use damp fingers for easier mixing, application, and a smooth appearance of the cured compound. Remove excess material before hardening begins.

**Curing:** RepairitQuik has a work life of 3 to 5 minutes. Functional cure occurs in 60 minutes.

**WARNING** • Contains Epoxy Resin and Tri (dimethylaminomethyl) phenol. Skin and eye irritant/sensitizer. Direct product contact may cause allergic reaction in some individuals. Wear impervious gloves when mixing or handling uncured product. Avoid contact with eyes. • Inhalation of dust may be harmful; wear dust mask and protective eyewear when sanding cured product. • Ingestion of product may be harmful. • KEEP OUT OF REACH OF CHILDREN. • See product insert or SDS for additional information.

Polymeric Systems, Inc., is a part of Whitford Worldwide. For more information, please contact Polymeric Systems or Whitford Ltd. at:

Polymeric Systems, Inc.  
47 Park Avenue  
Elverson, PA 19520  
888-EPOXY FIX (888-376-9934)  
Tel: +[1] (610) 286-2500  
Email: sales@polymericystems.com  
Website: polymericystems.com

In the EU contact:  
Whitford Ltd.  
11 Stuart Road, Manor Park  
Runcorn, Cheshire, UK WA7 1TH  
Tel: +[44] (0) 1928 571000  
Email: salesuk@whitfordww.com  
Website: whitfordww.com

NON-WARRANTY: ALL RECOMMENDATIONS, STATEMENTS AND TECHNICAL DATA CONTAINED HEREIN ARE BASED ON TESTS WE BELIEVE TO BE RELIABLE AND CORRECT, BUT ACCURACY AND COMPLETENESS OF SAID TESTS ARE NOT GUARANTEED AND ARE NOT TO BE CONSTRUED AS A WARRANTY, EITHER EXPRESS OR IMPLIED. USER SHALL RELY ON HIS OWN INFORMATION AND TESTS TO DETERMINE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY RESULTING FROM THIS USE OF THE PRODUCT. MANUFACTURER'S SOLE RESPONSIBILITY SHALL BE TO REPLACE THAT PORTION OF THE PRODUCT OF THE MANUFACTURER THAT PROVES TO BE DEFECTIVE. MANUFACTURER SHALL NOT BE LIABLE TO THE BUYER OR ANY THIRD PARTY FOR INJURY, LOSS OR DAMAGE DIRECTLY OR INDIRECTLY RESULTING FROM USE OF, OR INABILITY TO USE, THE PRODUCT. RECOMMENDATIONS OR STATEMENTS OTHER THAN THOSE CONTAINED IN A WRITTEN AGREEMENT SIGNED BY AN OFFICER OF THE MANUFACTURER SHALL NOT BE BINDING UPON THE MANUFACTURER.